
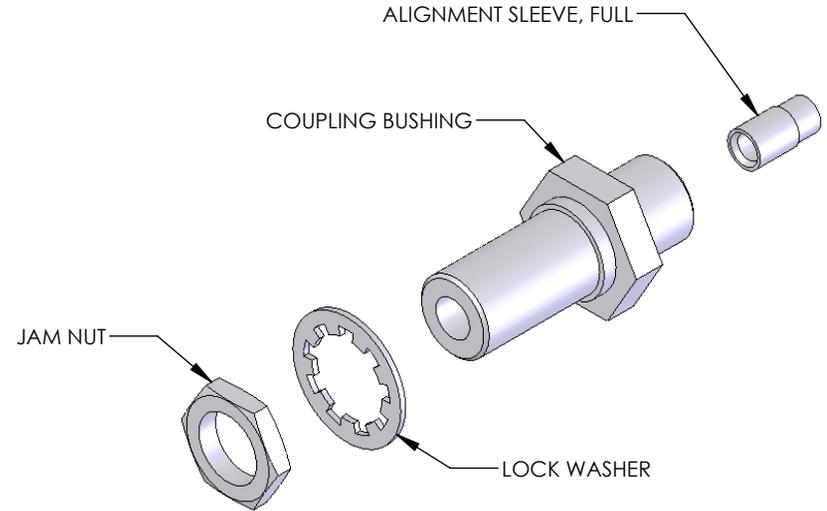


REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/16/2007	JJT

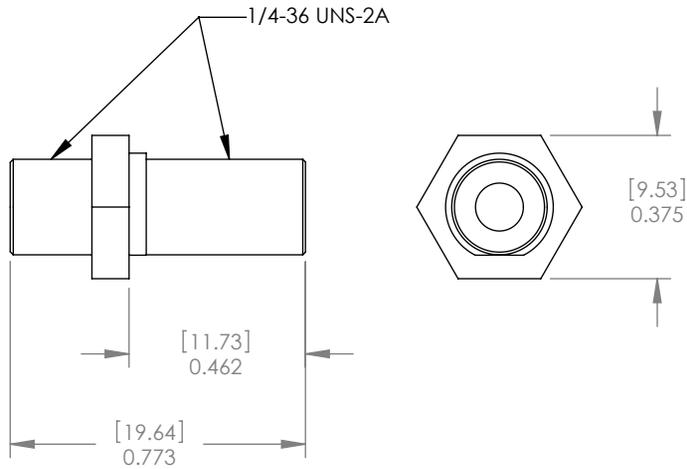

NOTES:  
 CHAMFER ALL HOLES TO REMOVE BURRS  
 TUMBLE TO UNIFORM MATTE FINISH  
 BREAK ALL SHARP EDGES  
 BLACK ANODIZED FINISH: MIL-A-8625, TYPE 2, CLASS 2

**TOLERANCES**

UNLESS OTHERWISE SPECIFIED:  
**DIMENSIONS ARE IN INCHES**  
**LINEAR TOLERANCES:**  
 TWO PLACE DECIMAL: ±0.010  
 THREE PLACE DECIMAL: ±0.005  
 ANGULAR: ±30'  
 SURFACE FINISH: 32 MICROINCHES  
 PARALLELISM: 0.002  
 FLATNESS: 0.002  
 STRAIGHTNESS: 0.002  
 CONCENTRICITY: 0.002  
 PERPENDICULARITY: 0.002  
 THREAD: CLASS 2 FIT

	NAME	DATE
DRAWN	JJT	04/16/2007
ENG APPR.	JJT	04/16/2007
MFG APPR.	-	-

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THORLABS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THORLABS, INC. IS PROHIBITED.

**THORLABS INC.** PO BOX 366  
 NEWTON NJ

TITLE:  
 SMA FIBER ADAPTER

MATERIAL: VARIOUS SIZE A REV. A

SCALE: 2:1 SHEET 1 OF 1

DWG. NO. 0844-E01 PART NO. ADASMA